


**DEVICE NAME : BUB 0641 RD(G)(H)**

Date : 02/16/2006

Mechanical Data :

ISSUED BY : De Pan

Rev Date : Index #:

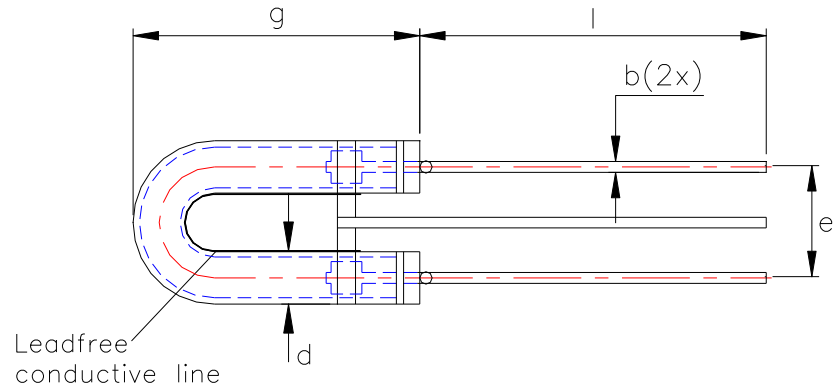

**Dimension(mm)**

<b>e</b>	10 ± 1	<b>l</b>	40 ± 2	<b>d</b>	6 ± 0.5 dia
<b>r</b>		<b>g</b>	30 ± 2	<b>x</b>	
<b>b</b>	0.8 ± 0.1 dia				

**Polarity :**

**Without Colour Corrective Coating :**

**Remarks:**

1. Envelope material : B1
2. RoHS Compliant
3. Reference no. : 96322429

**Device Name :**

**BUB 0641 RD(G)(H)**

**Operating Data :**

<b>Max. Power Pmax/W</b>	6	<b>Trigger coil TR</b>	ZS 1052 (H)
<b>Nom. Power Pnom / W</b>		<b>Trigger capacitor Cz/μF</b>	0.22
<b>Max. flashenergy Emax/Ws</b>	6	<b>Min. trigger voltage Uz min/V</b>	150
<b>Nom. flashenergy Enom/Ws</b>		<b>Trigger contact S</b>	Triac
<b>Max. anode voltage Uamax/V</b>	550	<b>Flash frequency/Hz</b>	0.4 - 4
<b>Nom. anode voltage Uanom/V</b>	500	<b>Life/Number of flashes/N</b>	5 x 10p6
<b>Min. anode voltage Uamin/V</b>	200	<b>Repetition rate trep/ s</b>	
<b>Nom.flash capacitor CB/μF</b>		<b>Sec trigger voltage Uz sec / KV</b>	- 5.6
<b>Light reduction after life/ %</b>		<b>(Unloaded)</b>	

**Remarks :**

Excelitas Proprietary & Confidential

HS-DDC-H24-0003

Excelitas

www.excelitas.com