


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9205-HS  
INSULATOR: HEAT SHRINK TUBING 221. BLACK.  
BODY: BRASS. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
2. P/N: 9202COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
FRAME: BRASS. NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
3. P/N: W-200/COLOR  
22AWG 65X40 TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

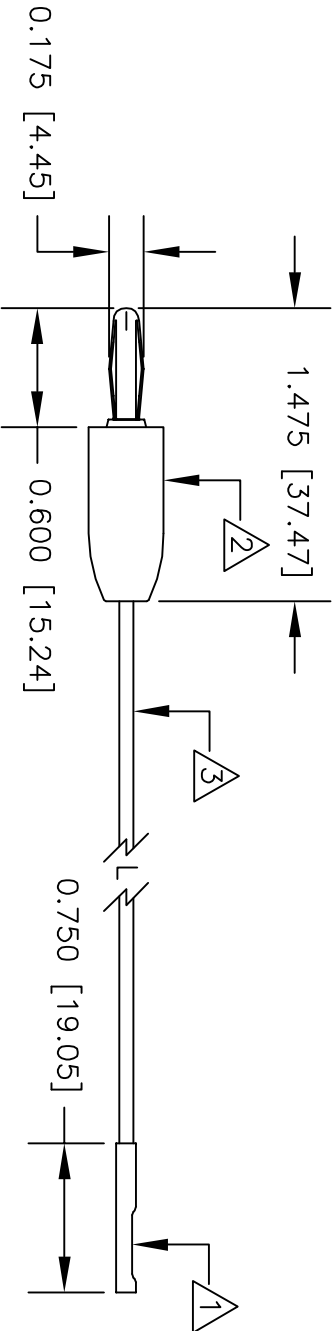

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ±	CONTRACT NO.		DESCRIPTION <b>E-ZHOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
	APPROVALS	DATE	
MATERIAL SEE NOTE.	DRAWN R.L.	10/10	SIZE A
FINISH SEE NOTE.	APPROVED BY		CODE IDENT. NO. 08505
USED ON			DRAWING NO. 9166
APPLICATION	DO NOT SCALE DRAWING		SCALE 1:1
			SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-ZHOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-ZHOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.