



SECTION C-C

NOTE:
 MATERIAL
 INSULATION MATERIAL: PBT+GF.
 CONTACT MATERIAL: PHOSPHOR BRONZE
 CONTACT PLATED: Tin 100u" Min.
 MAIN SPECIFICATIONS
 CONTACT CURRENT RATING: 1A
 WITHSTANDING VOLTAGE: AC 1000V 5s.
 INSULATION RESISTANCE: 1000MΩ 500V DC.
 OPERATING TEMPERATURE: -55°C ~ 105°C.

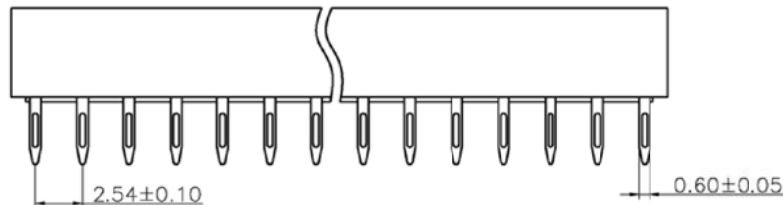

PIN NO.	DIM A	DIM B	DIM C	DIM D
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.1	15.24	17.78
40	50.8	48.26	15.24	17.78
48	60.69	58.42	15.24	17.78

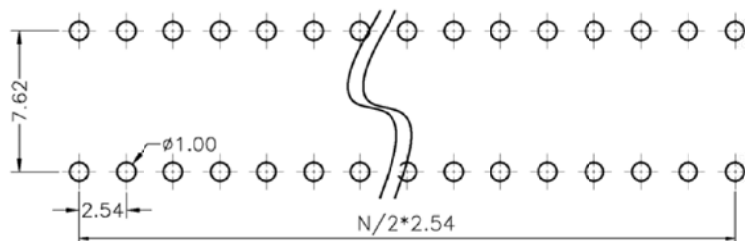

RECOMMENDED P.C.B LAYOUT

10/05/07	ING		NEW DWG		A0
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
-TOLERANCES- UNLESS OTHERWISE SPECIFIED			CnC Tech, LLC Industrial Cable and Connector Technology		
				TITLE: IC SOCKET PH:2.54mm DIP180 TIN PLATED	
X.X	±0.30	X.X*	±5.0°	APPD:	PRODUCT NO: 243-XX-1-06
X.XX	±0.20	X.XX*	±3.0°	CHECK:	DATE SCALE UNIT TYPE PAGE
X.XXX	±0.10	X.XXX*	±1.0°	DRAW:	2010.05.07 1:1 mm Z 1/1