


No.	1	2	3	4	5	6	7	8	1-8	1-8	15-30 V (DC)	2A per Signal	6A total
M8 cable color	white	green	yellow	grey	pink	red	black	violet	(+)	(-)			

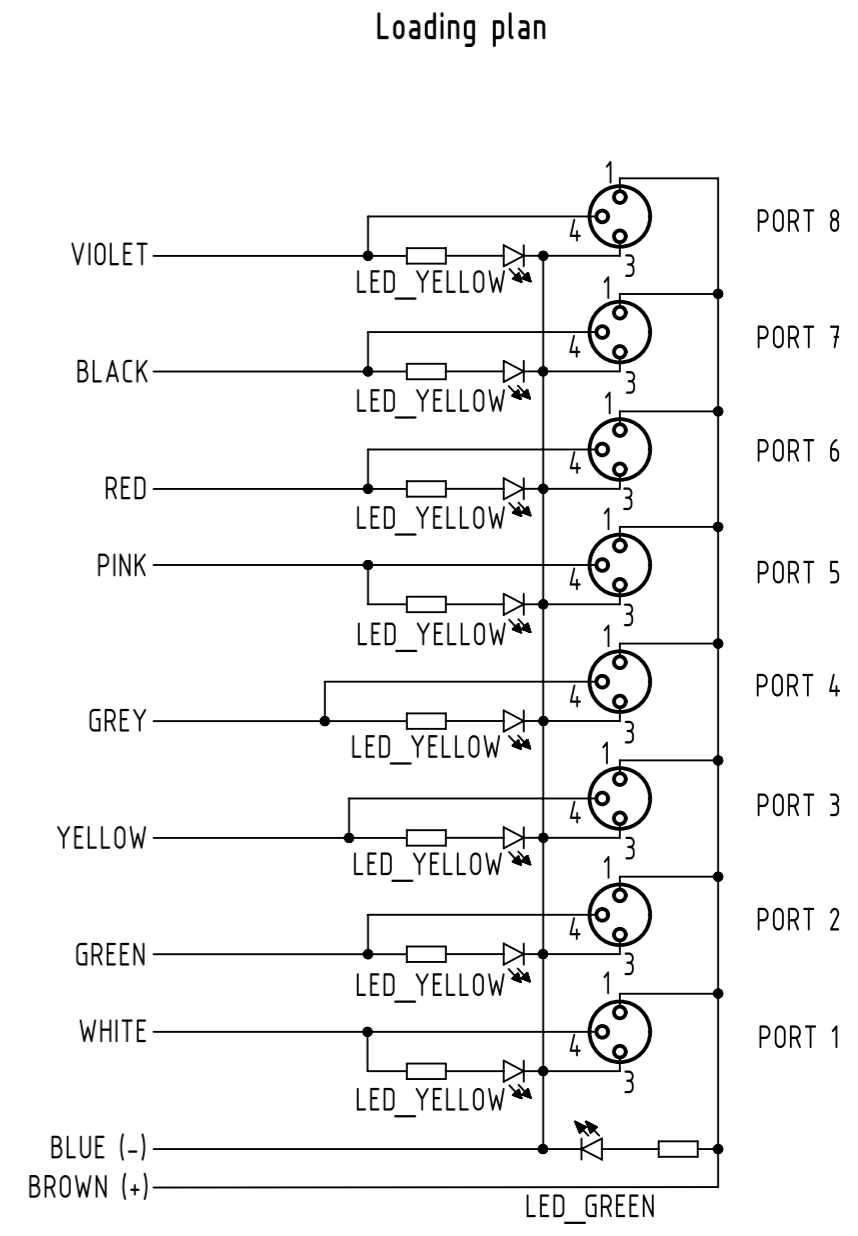

Electrical data:

- Rated voltage: 15-30V DC
- Nominal: 2 A per Contact
- Current: 6 A max total
- Protection level: IP 67
- Temperature range: -25°C...+80°C

PUR, max. 10x0.34 + 2x0.75	10
Type of cable	Dim. a[m]

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved Department HCS - RO		Created by MUNTEANV	Inspected by POPESCU	Standardisation AVRAM	Date 2017-04-24	State Final Release	
HARTING Customised Solutions D-32427 Minden		Title har-SAB M8/8/3p PAC		Doc-Key / ECM-Nr. 100689681/UGD/000/C 500000118447		Rev. C	Page 1/1
		Type TB	Number 090700120100				